


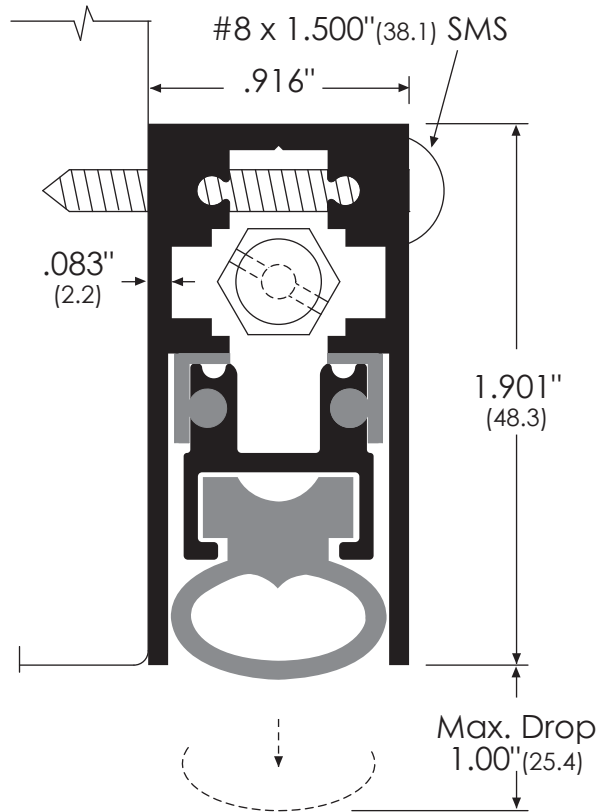
FIRE RATING

 UL listed

 10C Classified

SMOKE PERFORMANCE

 The rubber seal in this gasket provides protection from smoke infiltration in accordance with provisions of NFPA 101 Life Safety Code and NFPA 80 Standard for Fire Doors and Other Opening Protectives




Legend:

AA = Clear Anodized
D = Dark Bronze Anodized
G = Gold Anodized

ANSI/BHMA

#365AA / 365D / 365G

R3B334

	415 Concord Avenue tel: 718.585.3230 Bronx, NY 10455 fax: 718.292.2243 email: zero@zerointernational.com web site: www.zerointernational.com	Part No: 365	
	Notes:	Part Description: Automatic Door Bottom - Surface Mounted/Heavy Duty	
Provided By:	Customer Name:	Job No:	Date: